

EmoS – Emergency surface downlight




EmoS is our dedicated 3hour duration surface downlight with 3 hour duration with NiCd battery. Self test and Non Maintained IP20.

Robust design with IK08 and Polycarbonate construction

Non Maintained – Lights OFF until Mains power loss

Option of Corridor or open area optical control

Dimensions

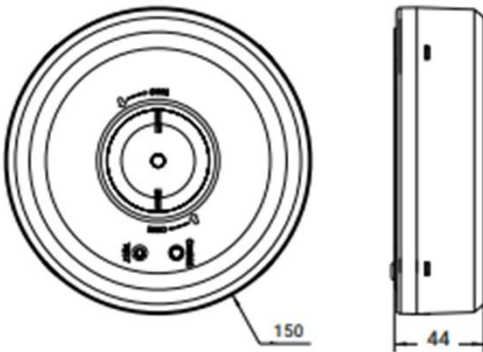

Technical Specification

Luminous flux	150lm
Beam Angle	160°
CCT	6000K
Power Consumption	3w
CRI	75+
Dimensions	150mmØ x 44mm
Dimming	Not available
Efficiency	50lm/w
Finish	White
Ingress Protection	IP20
Options	COR – Corridor function optic OPE – Open Area function optic

Specify code: EMOS-X (X – COR Corridor optic OPE Open Area optic)