

Lungo 163M 1271mm




Lungo 163M Architectural Aluminium Linear surface mounted or suspended with a suspension kit. TPa Opal or micro-prismatic diffuser to aid LG7 compliance.

Options:

- 3hour integral emergency (excludes 850mm version)
- SwitchDim, DALI, DSI dimming options
- Suspended version
- Tpa opal or Micro-prismatic diffuser
- 852mm, 1271mm, 1550mm, 2528mm



Dimensions

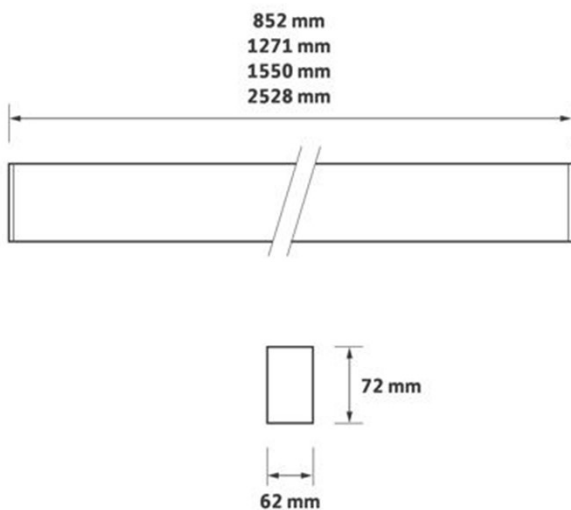

Technical Specification

Luminous flux	LO – 1835lm HO – 4276lm
Beam Angle	90°
CCT	3000K 4000K
Power Consumption	LO – 18w HO – 42w
CRI	80+
Dimensions	1271mm x 62mm x 72mm
Dimming	DALI
Efficiency	90lm/w
Finish	White, Black, Grey
Ingress Protection	IP40
Options	EM, Low Output, High Output Suspension kit, Tpa or Micro Pr

Specify code: Lungo-163M-CCT-Watts-OPTIONS (EM/SUS/TPA/MPR)