

## Lungo 163M 1550mm




Lungo 163M Architectural Aluminium Linear surface mounted or suspended with a suspension kit. TPa Opal or micro-prismatic diffuser to aid LG7 compliance.

Options:

- 3hour integral emergency (excludes 850mm version)
- SwitchDim, DALI, DSI dimming options
- Suspended version
- Tpa opal or Micro-prismatic diffuser
- 852mm, 1271mm, 1550mm, 2528mm



### Dimensions

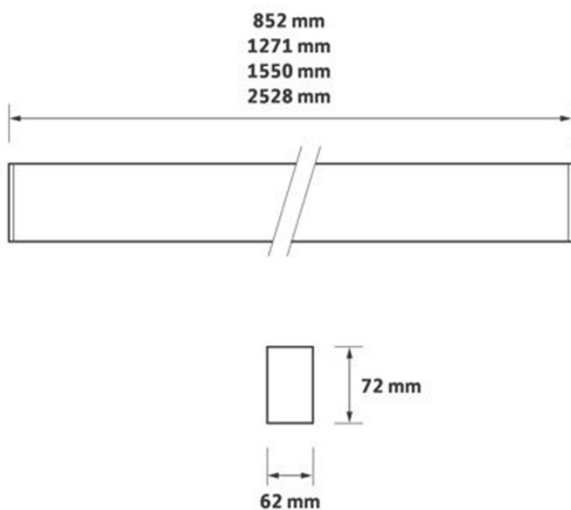

### Technical Specification

<b>Luminous flux</b>	LO – 2243lm HO – 5226lm
<b>Beam Angle</b>	90°
<b>CCT</b>	3000K 4000K
<b>Power Consumption</b>	LO – 21w HO – 50w
<b>CRI</b>	80+
<b>Dimensions</b>	1550mm x 62mm x 72mm
<b>Dimming</b>	DALI
<b>Efficiency</b>	90lm/w
<b>Finish</b>	White, Black, Grey
<b>Ingress Protection</b>	IP40
<b>Options</b>	EM, Low Output, High Output Suspension kit, Tpa or Micro Pr

**Specify code: Lungo-163M-CCT-Watts-OPTIONS (EM/SUS/TPA/MPR)**