

Lungo 173C 1271mm




Lungo 173C Architectural Aluminium Linear continuous surface mounted or suspended with a suspension kit. TPa Opal or micro-prismatic diffuser to aid LG7 compliance.

Options:

- 3hour integral emergency (excludes 850mm version)
- SwitchDim, DALI, DSI dimming options
- Suspended version
- Tpa opal or Micro-prismatic diffuser
- 852mm, 1271mm, 1550mm, 2528mm



Dimensions

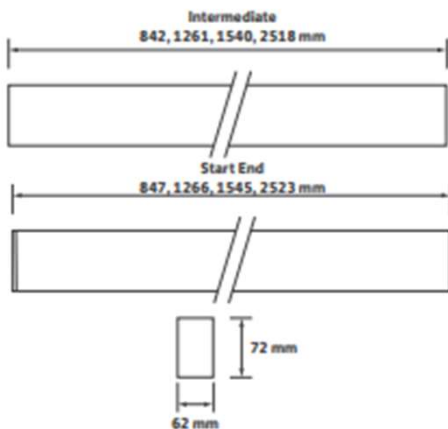

Technical Specification

| | |
|---------------------------|--|
| Luminous flux | LO – 1835lm HO – 4276lm |
| Beam Angle | 90° |
| CCT | 3000K 4000K |
| Power Consumption | LO – 18w HO – 42w |
| CRI | 80+ |
| Dimensions | 1271mm x 62mm x 72mm |
| Dimming | DALI |
| Efficiency | 90lm/w |
| Finish | White, Black, Grey |
| Ingress Protection | IP40 |
| Options | EM, Low Output, High Output Suspension kit, Tpa or Micro Pr |

Specify code: Lungo-173C-CCT-Watts-OPTIONS (EM/SUS/TPA/MPR)