


## Pico L80 Fixed - Magnetic

Pico L80 32w Mini 22mm fixed utilises our opal diffuser for general soft illumination incorporating COB LED technology improving colour rendering and consistent colour temperature. 24v DC Input.

Magnetic connection for easy relocation or replacement, these are to be used with our Magnetic track.



### Dimensions

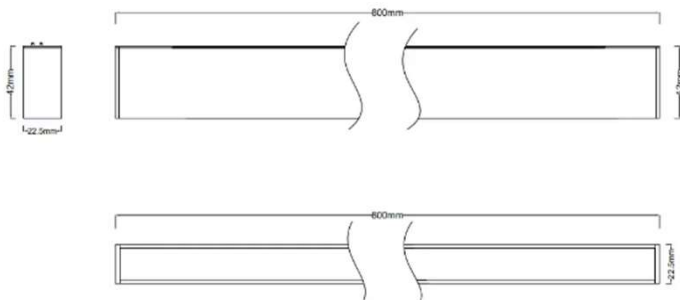

### Technical Specification

<b>Luminous flux</b>	1860lm
<b>Beam Angle</b>	100°
<b>CCT</b>	2700K 3000K 4000K
<b>Power Consumption</b>	32w
<b>CRI</b>	90+
<b>Dimensions</b>	800mm x 42mm x 22.5mm
<b>Dimming</b>	Mains Dimming, DALI, 1-10v
<b>Efficiency</b>	58lm/w
<b>Finish</b>	White / Black 9003/9005
<b>Ingress Protection</b>	IP20
<b>Options</b>	Baffle white or black

**Specify code: PICO-L80-CCT-BEAM-FINISH-DRIVER**