

Pico SP35 Adjustable - Magnetic




Pico SP35 5w Mini adjustable spotlight utilises our anti-glare deeply recessed baffle incorporating COB LED technology improving colour rendering and consistent colour temperature. 360° Rotation, with swivel tilt. 24v DC Input.

Magnetic connection for easy relocation or replacement, these are to be used with our Magnetic track.



Dimensions

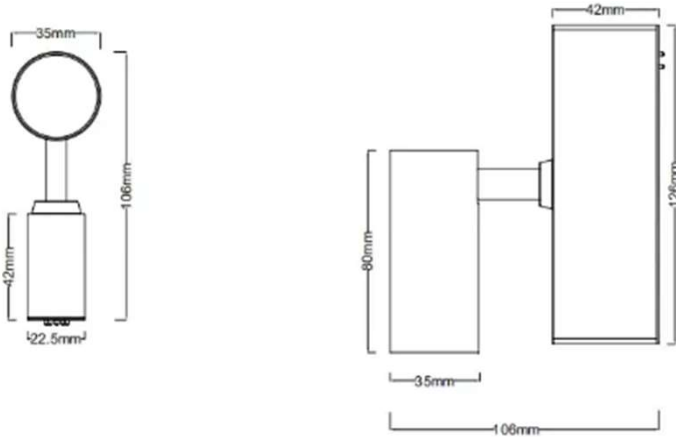

Technical Specification

Luminous flux	530lm
Beam Angle	20° 30° 40°
CCT	2700K 3000K 4000K
Power Consumption	5w
CRI	90+
Dimensions	35mm Ø x 80mm
Dimming	Mains Dimming, DALI, 1-10v
Efficiency	106lm/w
Finish	White / Black 9003/9005
Ingress Protection	IP20
Options	Baffle white or black

Specify code: PICO-SP35-CCT-BEAM-FINISH-DRIVER